

Article number: 03 037 00 99

## WC module MONTUS Flow H Type CS 120

WC module, height 115 cm with concealed cistern 12 cm. For barrier-free WCs. For stud wall or pre-wall mounting or exposed installation. For wall-mounted WC with 180 or 230 mm fastening dimension. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC. Integrated flush valve with drain via flush pipe for scheduled stagnation flushes. Self-supporting, powder-coated steel profiled frame with height-adjustable feet and cross bars. Saves water with dual flush and delayed filling process (saves about 0.5 l/flush). Flush triggering electronic or mechanical.

### Scope of delivery


- WC module
  - WC concealed cistern 12 cm, actuation from front
  - Angle valve with regulating function, G 1/2 AG, noise class I
  - Flush pipe Ø 45 mm, with construction plug
  - Height-adjustable special feet 0-15 cm, self-supporting
- WC connection set (supply Ø 45 mm, drain Ø 90/110 mm)
- PE reducer Ø 90 / 110 mm
- Conduit 5 m
- Fastening material for WC installation (fastening bolts M 12 x 200 mm, protection hoses, plastic collar bushings, nuts, flat washers, cover caps)
- Fastening material for installation feet
- MONTUS wall bracket set (150-210 mm)

### Technical data

- Material: Angle valve Brass, conform to German drinking water regulations; Frame Steel
- Dual flush: Eco flush volume 3 l, Main flush volume 4/5/6/7 l adjustable (6 l factory setting)
- Load capacity: max. 400 kg (when using MONTUS wall bracket set)
- Surface: Frame Powder coat finish
- Dimensions: w 42 cm x h 115 cm
- Waste water connection: Ø 90 /110 mm
- Flush pipe connection: Ø 45 mm
- Water connection: DN 15 R 1/2 AG (rear)
- Waste water outlet: Ø 90/110 mm

### Delivery data

- Weight: 17,44 kg/Piece
- Packing unit: 1

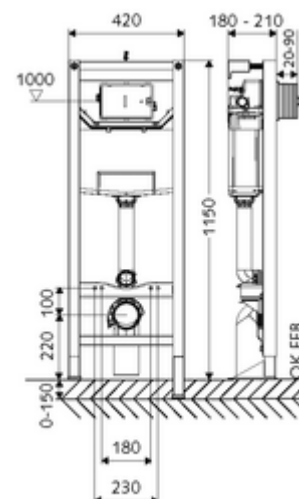

### Necessary associated articles

WC sound-insulation mat	Article no: 03 001 00 99
<u>For electronic actuation</u>	
Electronic conversion kit MONTUS	Article no: 03 127 00 99
<u>For networking with SWS water management system</u>	
SWS Server	Article no: 00 500 00 99
SWS Bus mains adapter	Article no: 00 505 00 99

SWS Bus Extender wired BE-K Flow                      Article no: 00 563 00 99 and/or  
SWS Bus Extender wireless BE-F Flow                  Article no: 00 564 00 99 and/or  
For operation with Single Control SSC  
SSC Bluetooth® module Flow                              Article no: 00 929 00 99  
For operation with Single Control SSC and electrical junction box  
Top-hat rail transformer 9 VDC, 100 - 240 VAC, 50 - 60 Hz      Article no: 01 582 00 99  
For operation with Single Control SSC and concealed junction box  
For operation with SWS BE-F wireless bus extender or Single Control SSC  
Electrical junction box 9 VDC, 100 - 240 VAC, 50 - 60 Hz      Article no: 01 583 00 99  
Mechanical and electronic WC operating panels - see overview on page XX

**Recommended associated articles**

High-load module MONTUS                                  Article no: 03 063 00 99  
Concealed junction box MONTUS FLOW                  Article no: 77 752 00 99  
SWS Temperature sensor PT 1000                        Article no: 00 562 00 99