

Article number: 09 414 06 99

Angle valve thermostat

Thermostatic anti-scalding protection fitting for installation on angle valve with G 3/8 AG outlet. Setting of max. draw-off temperature, concealed under cover cap. Performance of thermal disinfection possible (only by using tool).

Scope of delivery


- Angle valve thermostat
 - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
 - 2 backflow preventers (EN 1717: EB-type)
 - 2 pre-filters

Technical data

- Material: Cover cap Plastic; Housing Brass, conform to German drinking water regulations
- Thermal disinfection: possible, after releasing the temperature lock
- Flow at 3 bar: 13 l/min
- Max. operating temperature: 63 °C (70 °C for a short time for thermal disinfection)
- Max. Outlet temperature: 33 - 50 °C adjustable (38 °C $\pm$ 2 K)
- Surface: Chrome
- Connection: G 3/8 IG, G 3/8 AG
- Outlet: G 3/8 AG
- Certificates: P-IX 29876/I, DIN-DVGW, ACS, Belgaqua, WRAS
- Noise class: I, at 100% flow

Delivery data

- Weight: 0,61 kg/Piece
- Packing unit: 1

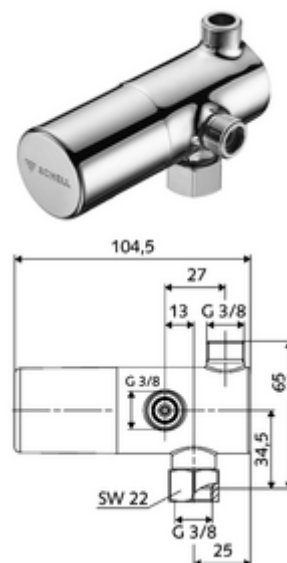

Necessary associated articles

Pipe set for angle valve thermostat	Article no: 04 115 06 99	or
Connecting set for angle valve thermostat	Article no: 04 116 06 99	or

Recommended associated articles

Angle valve COMFORT PT	Article no: 04 992 06 99
Sampling pipe for sampling valves	Article no: 03 835 06 99