


Article number: 09 415 06 99

## Angle valve thermostat set Rigid design

Thermostatic anti-scalding protection fitting incl. pipe set for installation on angle valves with G 3/8 AG outlet. Setting of max. draw-off temperature, concealed under cover cap, only possible with tool.

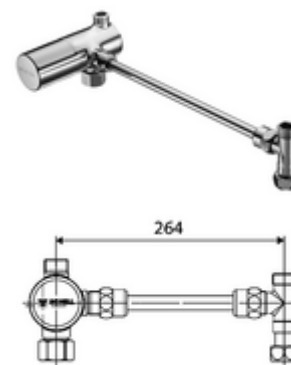

### Scope of delivery

#### Angle valve thermostat (09 414 06 99)

- Angle valve thermostat
  - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
  - 2 backflow preventers (EN 1717: EB-type)
  - 2 pre-filters

#### Pipe set for angle valve thermostat (04 115 06 99)

- T-piece with movable union nut G 3/8 IG
- Connection pipe with 2 high-tensile SCHELL brass cone compression connections with length compensation

### Technical data

#### Angle valve thermostat (09 414 06 99)

- Material: Cover cap Plastic; Housing Brass, conform to German drinking water regulations
- Thermal disinfection: possible, after releasing the temperature lock
- Flow at 3 bar: 13 l/min
- Max. operating temperature: 63 °C (70 °C for a short time for thermal disinfection)
- Max. Outlet temperature: 33 - 50 °C adjustable (38 °C  $\pm$  2 K )
- Surface: Chrome
- Connection: G 3/8 IG, G 3/8 AG
- Outlet: G 3/8 AG
- Certificates: P-IX 29876/I, DIN-DVGW, ACS, Belgaqua, WRAS
- Noise class: I, at 100% flow

#### Pipe set for angle valve thermostat (04 115 06 99)

- Surface: Chrome
- Connection: G 3/8 IG

5. Certificates: P-IX 29876/I, DIN-DVGW, ACS, Belgaqua, WRAS

6. Noise class: I, at 100% flow

### Delivery data

- Weight: 0,87 kg/Set
- Packing unit: 1

---

**Recommended associated articles**

Angle valve COMFORT PT

Article no: 04 992 06 99

or

Sampling pipe for sampling valves

Article no: 03 835 06 99

or

**Mounting instructions**