

Article number: 03 849 06 99

Combination angle valve

Scope of delivery


- Combination angle valve
 - 2 three-cornered tap handles
 - Backflow preventer (EN 1717: EB-type) in appliance connection outlet
 - Anti-vacuum device (EN 1717: HB-type) in appliance connection outlet
 - ASAG easy (Self-sealing connection thread)
 - Sanitary head part
 - Long push rod
- Hose screw connection
- High-tensile brass cone compression connection with length compensation
- Push rosette Ø 54 mm

Technical data

- Material: Brass, conform to German drinking water regulations
- Surface: Chrome
- Connection: DN 15 G 1/2 AG with ASAG easy
- Outlet: Ø 10 mm (DN 10 G 1/2 AG), Hose screw connection Ø 14.5 mm (DN 20 G 3/4 AG)
- Safety device, conforms to EN 1717: HD
- Certificates: PA-IX 026/IIA, DVGW, ACS
- Noise class: II, at 100% flow
- Flow class: A

Delivery data

- Weight: 0,46 kg/Piece
- Packing unit: 20

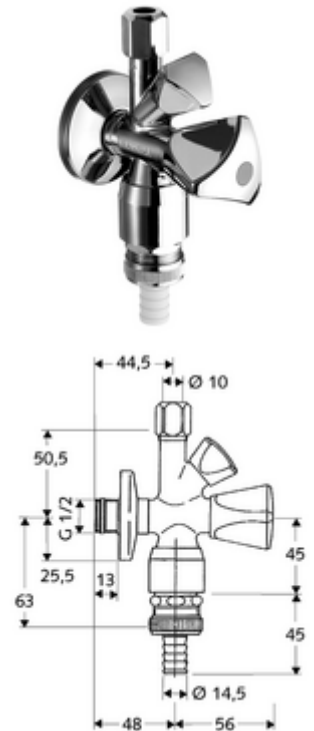

Hint