

Article number: 03 057 00 99

## WC module MONTUS Type C 120

WC module, height 115 cm with concealed cistern 12 cm. For stud wall or pre-wall mounting or exposed installation. For wall-mounted WC with 180 or 230 mm fastening dimension. Self-supporting, powder-coated steel profiled frame with height-adjustable feet. Saves water with dual flush and delayed filling process (saves about 0.5 l/flush). Flush triggering electronic or mechanical.

### Scope of delivery


- WC module
  - WC concealed cistern 12 cm, actuation from front
  - Angle valve with regulating function, G 1/2 AG, noise class I
  - Galvanised, height-adjustable mounting feet 0 - 20 cm with slip resistance
- WC sound-insulation mat
- MONTUS wall bracket set (120-170 mm)

### Technical data

- Dual flush: Eco flush volume 3 l, Main flush volume 4/5/6/7 l adjustable (6 l factory setting)
- Load capacity: max. 400 kg (when using MONTUS wall bracket set)
- Waste water connection: Ø 90 /110 mm
- Flush pipe connection: Ø 45 mm
- Water connection: DN 15 R 1/2 AG (rear centre)
- Waste water outlet: Ø 90 /110 mm
- Material: Frame Steel
- Surface: Frame Powder coat finish
- Dimensions: W 50 cm x h 115 cm
- Certificates: Belgaqua

### Delivery data

- Weight: 13,04 kg/Piece
- Packing unit: 1

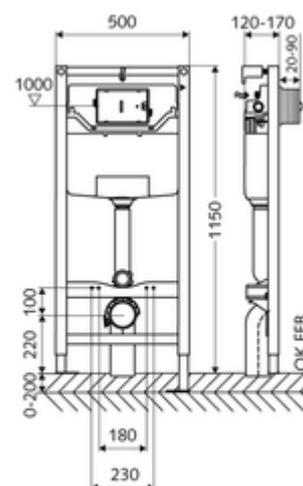

### Necessary associated articles

For mechanical actuation

Article no: 03 119 06 99 or  
 Article no: 03 119 64 99 or  
 Article no: 03 119 15 99 or  
 Article no: 03 120 64 99 or  
 Article no: 03 120 06 99 or  
 Article no: 03 120 15 99 or  
 Article no: 03 121 64 99 or  
 Article no: 03 121 06 99 or  
 Article no: 03 121 15 99 or  
 Article no: 03 122 06 99 or  
 Article no: 03 122 64 99 or  
 Article no: 03 122 15 99 or  
 Article no: 03 070 28 99 or  
 Article no: 03 126 06 99 or

For electronic actuation

Article no: 03 126 64 99 or

Article no: 03 127 00 99

Article no: 03 123 06 99 or

WC operating panel MONTUS FIELD H

Article no: 03 124 06 99 or