

Article number: 03 144 00 99

## WC module MONTUS Type C 90 - 2/4 I

WC module, height 115 cm with concealed cistern 8 cm. For flat stud partition/exposed installation. For wall-mounted WC with 180 or 230 mm fastening dimension. Self-supporting, powder-coated steel profiled frame with height-adjustable feet. Saves water with dual flush and delayed filling process (saves about 0.5 l/flush).

### Scope of delivery


- WC module
  - Angle valve with regulating function, G 1/2 AG, noise class I
  - Height-adjustable installation feet 0-15 cm
  - WC concealed cistern 8 cm, actuation from front
- Fastening material for WC installation (fastening bolts M 12 x 200 mm, protection hoses, plastic collar bushings, nuts, flat washers, cover caps)
- Fastening material for installation feet

### Technical data

- Dual flush:
- Waste water connection: Ø 90 /110 mm
- Flush pipe connection: Ø 45 mm
- Water connection: DN 15 R 1/2 AG (top)
- Waste water outlet: Ø 90 /110 mm
- Material: Frame Steel
- Surface: Frame Powder coat finish
- Dimensions: W 50 cm x h 115 cm
- Certificates: SASO

### Delivery data

- Weight: 12,20 kg/Piece
- Packing unit: 1

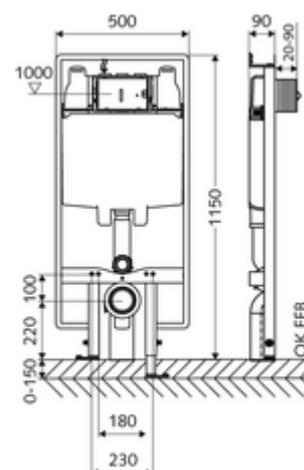

### Necessary associated articles

#### For mechanical actuation

Article no: 03 001 00 99

Article no: 03 119 15 99

Article no: 03 119 64 99

Article no: 03 119 06 99

Article no: 03 120 06 99

Article no: 03 120 15 99

Article no: 03 120 64 99

Article no: 03 121 64 99

Article no: 03 121 15 99

Article no: 03 121 06 99

Article no: 03 122 06 99

Article no: 03 122 64 99

Article no: 03 122 15 99

Article no: 03 070 28 99

Article no: 03 126 06 99

For electronic actuation

Article no: 03 126 64 99

Article no: 03 125 00 99

Article no: 03 123 06 99

WC operating panel MONTUS FIELD H

Article no: 03 124 06 99

### Hint

- When using support or support folding handles for barrier-free WCs, combine with MONTUS type CS 120 WC module (width: 42 cm).