

Article number: 01 800 00 99

## Concealed Masterbox WBD-SC-T

### Mixed water, ThermoProtect thermostat

For LINUS/LINUS Basic D-SC-T concealed shower fittings. Manual actuation with automatic closing. With sealed housing bushings and internal isolating valve. Additional acceptance possible of a solenoid valve for thermal disinfection.



#### Scope of delivery



- Masterbox
  - 2 pre-filters
  - Roughing-in housing
  - 2 backflow preventers (EN 1717: EB-type)
  - Concealed shower tap with 2 isolating valves
  - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
  - Self-closing cartridge SC II
- Flushing nozzle
- Flush-mounted cap

#### Technical data

- Running time: 5 - 30 s adjustable
- Flow at 3 bar: 10 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (for thermal disinfection 80 °C max. 10 min./day)
- Installation depth: 88 - 112 mm
- Connection: 2x G 1/2 IG
- Outlet: G 1/2 IG
- Material: Housing Plastic, Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Dimensions: W 125 mm x h 246 mm x d 158 mm
- Certificates: P-IX 18001/IA, DIN-DVGW, Belgaqua
- Noise class: I
- Flow class: A

#### Delivery data

- Weight: 3,08 kg/Piece
- Packing unit: 1

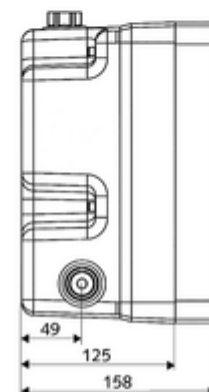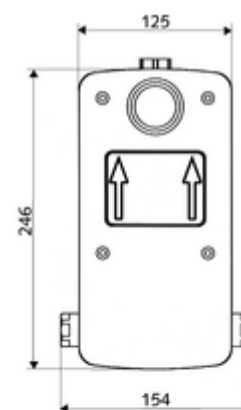

#### Necessary associated articles

Concealed shower LINUS D-SC-T	Article no: 01 809 06 99	or
Concealed shower LINUS D-SC-T	Article no: 01 809 28 99	or
Concealed shower LINUS Basic D-SC-T	Article no: 01 900 28 99	or
<u>For building sealing according to DIN 18534</u>		
Expansion sleeve	Article no: 00 920 00 99	

#### Recommended associated articles

Shower module MONTUS	Article no: 03 091 00 99
----------------------	--------------------------