


Article number: 01 822 00 99

## Concealed Masterbox WBD-E-V Pre-mixed water

For LINUS Basic D-C-V concealed shower fitting. Electronic actuation. With sealed housing bushings and internal isolating valve.

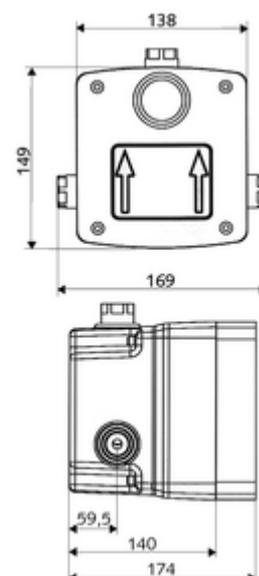

### Scope of delivery

- Masterbox
  - Concealed shower tap with isolating valve
  - Pre-filter
  - Roughing-in housing
  - Backflow preventer (EN 1717: EB-type)
  - 6 V solenoid valve
- Flushing nozzle
- Flush-mounted cap

### Technical data

- Flow at 3 bar: 15 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Installation depth: 100 - 124 mm
- Connection: DN 15 G 1/2 IG
- Outlet: DN 15 G 1/2 IG
- Material: Housing Plastic, Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Dimensions: W 138 mm x h 149 mm x d 140 mm
- Certificates: P-IX 18001/IA, Belgaqua
- Noise class: I
- Flow class: A

### Delivery data

- Weight: 1,79 kg/Piece
- Packing unit: 1

### Necessary associated articles

Concealed shower LINUS Basic D-C-V	Article no: 01 921 28 99
<u>For building sealing according to DIN 18534</u>	
Expansion sleeve	Article no: 00 919 00 99

### Recommended associated articles

Shower module MONTUS	Article no: 03 091 00 99
----------------------	--------------------------

### Mounting instructions

- Provide power supply in accordance with the respective shower electronics.