

Article number: 00 815 08 99

Shower panel LINUS DP-SC-T

Mixed water, ThermoProtect thermostat

Solenoid valve for thermal disinfection integrated.

Scope of delivery

- Self-closing exposed shower panel
 - 2 pre-filters
 - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
 - SC self-closing button
 - 2 backflow preventers (EN 1717: EB-type)
 - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
 - Solenoid valve 12 V for carrying out thermal disinfection with key switch (without SWS, in accordance with DVGW worksheet W 551)
 - Self-closing cartridge SC II
- Shower head COMFORT Flex, adjustable angle of inclination 12 - 32°, vandal-resistant, with soft jet and anti-limescale knob
- Connection accessories with isolating valve(s)
- Fastening material for wall installation

Technical data

- Running time: 5 - 30 s adjustable (20 s)
- S_Durchfluss: max. 9 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. operating temperature: 70 °C temporarily
- Connection: 2x DN 15 G 1/2 AG
- Material: Actuation Brass, Shower head Brass, conform to German drinking water regulations, Housing Aluminium, Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Surface: Actuation Chrome, Shower head Chrome, Housing Brushed anodised aluminium
- Dimensions: W 226 mm x h 1200 mm x d 115 mm
- Certificates: Belgaqua

Delivery data


- Weight: 15,42 kg/Piece
- Packing unit: 1

Necessary associated articles

Thermal disinfection key switch	Article no: 01 538 00 99
Concealed power supply unit 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 566 00 99 or 01 566 00 99 or - 60 Hz
Mains adapter VDC, 100-240 VAC, 50-60 Hz	Article no: 01 490 00 99 or 01 490 00 99 or - 60 Hz
Electrical junction box 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 537 00 99 or 01 537 00 99 or - 60 Hz

Recommended associated articles

Soap tray shower panel LINUS	Article no: 00 809 08 99
------------------------------	--------------------------

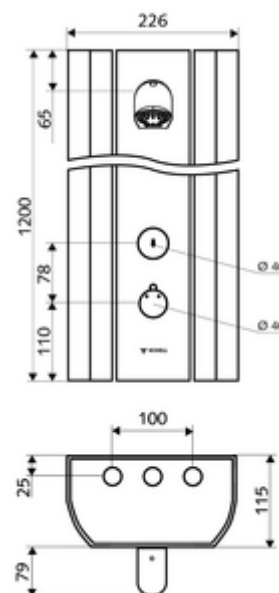

Handle for thermostat EasyGrip

Article no: 29 192 06 99

Sampling valve COMFORT Flex

Article no: 01 823 00 99

For exposed connections from above

Pipe set shower panel connection 500 mm

Article no: 08 481 06 99 or

Pipe set shower panel connection 1000 mm

Article no: 08 482 06 99 or

Connection cover shower panel LINUS 150 - 450 mm

Article no: 00 839 08 99 or

Connection cover shower panel LINUS 150 - 950 mm

Article no: 00 840 08 99 or