

Article number: 00 825 08 99

## Shower panel LINUS DP-SC-T

### Mixed water, ThermoProtect thermostat

Made from a strong extruded aluminium profile with a high-quality, anodised finish. Manual actuation with automatic closing. Pivoting front panel for easy installation and servicing. Suitable for connections from rear or for exposed connections from above. Solenoid valve for thermal disinfection, integrated or optional.

#### Scope of delivery


- Self-closing exposed shower panel
  - 2 pre-filters
  - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
  - SC self-closing button
  - 2 backflow preventers (EN 1717: EB-type)
  - ThermoProtect thermostat, conform to EN 1111, anti-scalding protection if cold water supply fails
  - Solenoid valve 12 V for carrying out thermal disinfection with key switch (without SWS, in accordance with DVGW worksheet W 551)
  - Self-closing cartridge SC II
- Low aerosol shower head 20° ±6°, vandal-resistant
- Connection accessories with isolating valve(s)
- Fastening material for wall installation

#### Technical data

- Running time: 5 - 30 s adjustable (20 s )
- S\_Durchfluss: max. 9 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. operating temperature: 70 °C temporarily
- Connection: 2x DN 15 G 1/2 AG
- Material: Actuation Brass, Shower head Brass, conform to German drinking water regulations, Housing Aluminium, Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Surface: Actuation Chrome, Shower head Chrome, Housing Brushed anodised aluminium
- Dimensions: W 226 mm x h 1200 mm x d 115 mm
- Certificates: Belgaqua

#### Delivery data

- Weight: 14,90 kg/Piece
- Packing unit: 1

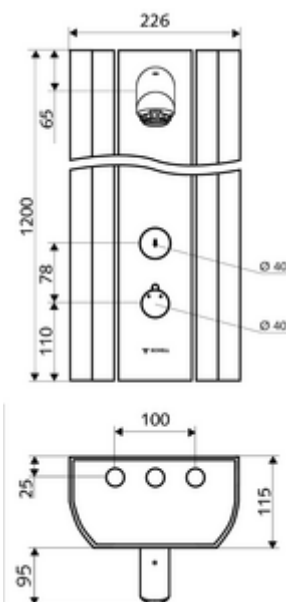

#### Necessary associated articles

Thermal disinfection key switch	Article no: 01 538 00 99
Concealed power supply unit 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 566 00 99 or 01 566 00 99 or - 60 Hz
Mains adapter VDC, 100-240 VAC, 50-60 Hz	Article no: 01 490 00 99 or 01 490 00 99 or - 60 Hz
Electrical junction box 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 537 00 99 or 01 537 00 99 or - 60 Hz

**Recommended associated articles**

Soap tray shower panel LINUS	Article no: 00 809 08 99
Handle for thermostat EasyGrip	Article no: 29 192 06 99
Sampling valve for shower heads	Article no: 01 817 00 99
<u>For exposed connections from above</u>	
Pipe set shower panel connection 500 mm	Article no: 08 481 06 99 or
Pipe set shower panel connection 1000 mm	Article no: 08 482 06 99 or
Connection cover shower panel LINUS 150 - 450 mm	Article no: 00 839 08 99 or
Connection cover shower panel LINUS 150 - 950 mm	Article no: 00 840 08 99 or