

Article number: 00 845 28 99

## Shower panel LINUS Inox DP-SC-T Mixed water, ThermoProtect thermostat

Solenoid valve for thermal disinfection integrated.

### Scope of delivery

- Self-closing exposed shower panel
  - ThermoProtect thermostat, conform to EN 1111, unlockable/lockable temperature lock at 38 °C, anti-scalding protection if cold water supply fails
  - Operating button for thermostat with push sleeve, temperature setting unlockable/lockable at 38 °C
  - SC self-closing button
  - Solenoid valve 12 V for carrying out thermal disinfection with key switch (without SWS, in accordance with DVGW worksheet W 551)
  - Self-closing cartridge SC II
- 2 backflow preventers (EN 1717: EB-type)
- 2 pre-filters
- Shower head COMFORT Flex, adjustable angle of inclination 12 - 32°, vandal-resistant, with soft jet and anti-limescale knob
- Connection accessories with isolating valve(s)
- Fastening material for wall installation

### Technical data

- Running time: 5 - 30 s adjustable (20 s )
- S\_Durchfluss: max. 9 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C temporarily
- Connection: 2x DN 15 G 1/2 AG
- Material: Actuation Brass, Housing Stainless steel 1.4404, Piping Plastic, conform to German drinking water regulations, Waterpath Brass, conform to German drinking water regulations
- Surface: Actuation Chrome, Housing Brushed stainless steel
- Dimensions: W 240 mm x h 1200 mm x d 80 mm
- Certificates: Belgaqua

### Delivery data


- Weight: 12,80 kg/Piece
- Packing unit: 1

### Necessary associated articles

Thermal disinfection key switch	Article no: 01 538 00 99
Concealed power supply unit 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 566 00 99 or
Mains adapter VDC, 100-240 VAC, 50-60 Hz	Article no: 01 490 00 99 or
Electrical junction box 12 VDC, 100 - 240 VAC, 50 - 60 Hz	Article no: 01 537 00 99 or

### Recommended associated articles

Soap tray shower panel LINUS inox Article no: 00 850 28 99

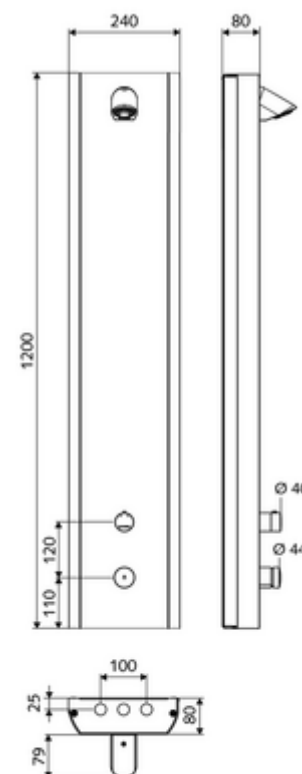

Pipe set shower panel connection 500 mm	Article no: 08 481 06 99	or
Pipe set shower panel connection 1000 mm	Article no: 08 482 06 99	or
Connection cover shower panel LINUS inox	Article no: 00 849 28 99	or
Connection cover shower panel LINUS inox	Article no: 00 851 28 99	or
Handle for thermostat EasyGrip	Article no: 29 192 06 99	
Sampling valve COMFORT Flex	Article no: 01 823 00 99	
Low aerosol shower head	Article no: 01 814 06 99	