

Article number: 02 483 06 99

Exposed urinal flush valve SCHELLOMAT Basic, DN 15 Benelux model

All-metal design with brass push button. Conform to EN 12541.

Scope of delivery


- Exposed urinal flush valve
 - Self-closing cartridge with nozzle bore pre-filter
- Urinal internal connector
- Push rosette \varnothing 60 mm
- Flush pipe \varnothing 15 mm x 314 mm, with pipe interrupter

Technical data

- Flow pressure: 0.8 - 5.0 bar
- Connection: DN 15 G 1/2 AG
- Outlet: Internal connector \varnothing 43 mm (flush pipe \varnothing 15 mm)
- Flush flow: 0.0 - 0.3 l/s
- Flush volume adjustable: 1.0 - 6.0 l
- Material: Parts in contact with water Brass, conform to German drinking water regulations, Plastic
- Surface: Chrome
- Certificates: PA-IX 9892/II, DIN-DVGW, Belgaqua
- Noise class: II, at 100% flow

Delivery data

- Weight: 0,78 kg/Piece
- Packing unit: 1

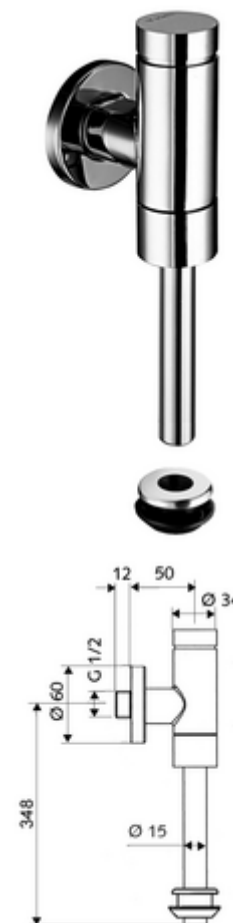

Recommended associated articles

| | |
|--------------------------------|--------------------------|
| Flush pipe \varnothing 15 mm | Article no: 50 744 06 99 |
| Urinal module MONTUS | Article no: 03 090 00 99 |