


Article number: 01 933 28 99

## Unterputz-Waschtisch-Armatur LINUS W-E-M Mixed water

For WBW-E-M concealed masterbox. Infrared sensor-controlled. Mains operation. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC.

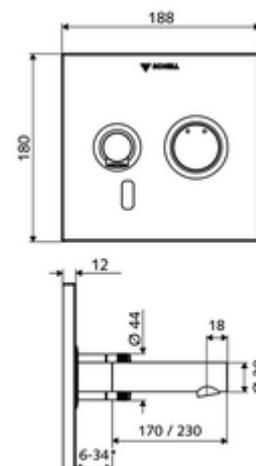

\* In Abhängigkeit der SCHELL Unterputz-Masterbox

### Scope of delivery

- Front panel with infrared sensor window
  - Mixed water operating button with push sleeve
- Installation frame with infrared sensor electronics, programmable
- Concealed transformer 9 VDC, 100-240 VAC, 50-60 Hz
- Wall outlet with flow regulator (theft-safe)
- Fastening material

### Technical data

- Setting options via SWS SSC
  - Sensor range (short/medium/long)
  - Programming via short range reflex (off/on)
  - Max. flow time (1-360 s)
  - Follow-up time (0.6-60 s)
  - Stagnation flush (off/5-600 s, every 1-240 h after last flush/every 1-240 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/15-600 s)
  - Duration of flow (off/15-600 s)
  - Energy saving mode (off/1-254 h after last flush)
  - Cleaning stop (off/60-360 s)
- Setting options via short range reflex
  - Sensor range (short/medium/long)
  - Stagnation flush (off/30 s, every 24 h after last flush/every 24 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/300 s/120 s)
  - Cleaning stop (off/60 s)
- Flow: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Material: Outlet Brass, conform to German drinking water regulations, Actuation Brass, Front panel Stainless steel
- Surface: Outlet Chrome, Actuation Chrome, Front panel Brushed stainless steel
- Outlet: L 230 mm
- Dimensions front plate: W 188 mm x h 180 mm x d 12 mm

### Delivery data

- Weight: 2,20 kg/Piece
- Packing unit: 1

### Necessary associated articles

Concealed Masterbox WBW-E-M

Article no: 01 946 00 99

**Recommended associated articles**

SSC Bluetooth® module	Article no: 00 916 00 99	
Wash basin outlet valve OPEN	Article no: 02 002 06 99	or
Wash basin outlet valve PUSH OPEN	Article no: 02 000 06 99	or