

Article number: 01 637 06 99

Exposed wash basin tap VITUS VW-AH-T Mixed water, ThermoProtect thermostat

Manual open/closed actuation with clinic arm lever.

Scope of delivery


- Open/closed exposed wash basin tap
 - ThermoProtect thermostat, conform to EN 1111, unlockable/lockable temperature lock at 38 °C, anti-scalding protection if cold water supply fails
 - 2 backflow preventers (EN 1717: EB-type)
 - Low aerosol aerator (laminar jet)
 - Ergonomic clinic arm lever 153 mm
 - Open/closed ceramic cartridge
 - Pivoting outlet (lockable)
- 2 S-connections and rosettes (depth-adjustable)

Technical data

- Flow: 7.5 - 9.0 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 2x DN 15 G 1/2 AG
- Material: Outlet Brass, conform to German drinking water regulations, Actuation Brass, Housing Brass, conform to German drinking water regulations
- Surface: Chrome
- Projection to centre of aerator: 270 mm
- Certificates: PA-IX 38236/IO, Belgaqua
- Noise class: I
- Flow class: O

Delivery data

- Weight: 5,25 kg/Piece
- Packing unit: 1

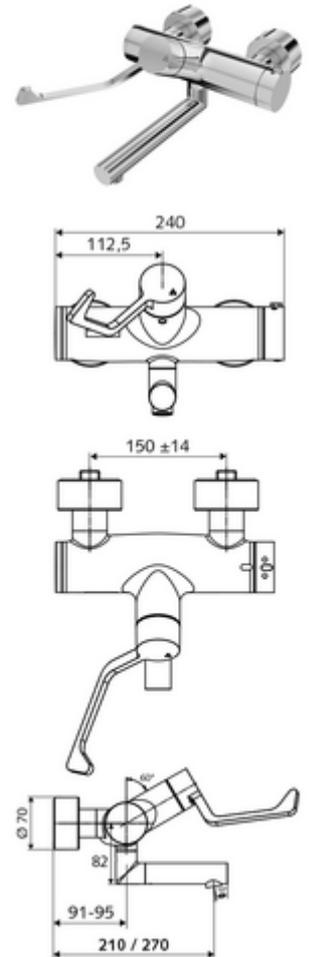

Recommended associated articles

S-connecting with isolating valve	Article no: 23 775 00 99	
Wash basin outlet valve OPEN	Article no: 02 002 06 99	or
Wash basin outlet valve PUSH OPEN	Article no: 02 000 06 99	or