

Article number: 01 657 06 99

## Exposed wash basin tap VITUS VW-AH-T Mixed water, ThermoProtect thermostat

Manual open/closed actuation with clinic arm lever.

### Scope of delivery


- Open/closed exposed wash basin tap
  - ThermoProtect thermostat, conform to EN 1111, unlockable/lockable temperature lock at 38 °C, anti-scalding protection if cold water supply fails
  - 2 backflow preventers (EN 1717: EB-type)
  - Low aerosol aerator (laminar jet)
  - Ergonomic clinic arm lever 153 mm
  - Valve for carrying out manual thermal disinfection (in accordance with DVGW worksheet W 551)
  - Open/closed ceramic cartridge
  - Pivoting outlet (lockable)
- 2 S-connections and rosettes (depth-adjustable)

### Technical data

- Flow: 7.5 - 9.0 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 2x DN 15 G 1/2 AG
- Material: Outlet Brass, conform to German drinking water regulations, Actuation Brass, Housing Brass, conform to German drinking water regulations
- Surface: Chrome
- Projection to centre of aerator: 210 mm
- Certificates: PA-IX 38236/IO, Belgaqua, WRAS applied
- Noise class: I
- Flow class: O

### Delivery data

- Weight: 5,18 kg/Piece
- Packing unit: 1

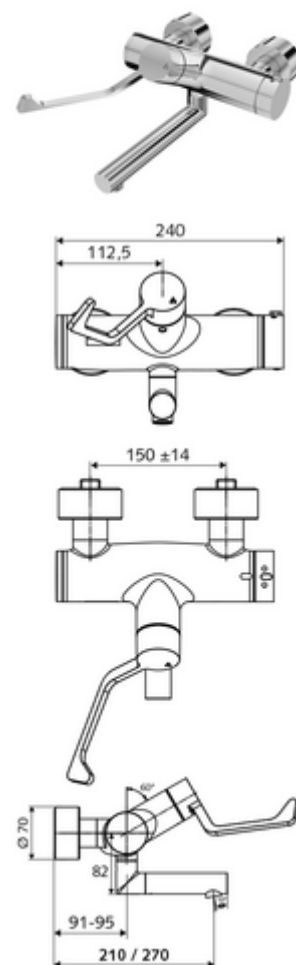

### Recommended associated articles

|                                   |                          |    |
|-----------------------------------|--------------------------|----|
| S-connecting with isolating valve | Article no: 23 775 00 99 |    |
| Wash basin outlet valve OPEN      | Article no: 02 002 06 99 | or |
| Wash basin outlet valve PUSH OPEN | Article no: 02 000 06 99 | or |