

Article number: 01 953 06 99

## Exposed wash basin tap MODUS E HD-K - high-pressure cold water/pre-mixed water

Infrared sensor-controlled. Battery operation.

### Scope of delivery


- Infrared sensor wall outlet tap
  - Aerator
  - Isolating valve
  - Infrared sensor electronics, programmable
  - 6 V solenoid valve
  - 6 V battery compartment (integrated)
- 4x AA alkaline battery 1.5 V
- Push rosette

### Technical data

- Setting options via short range reflex
  - Sensor range area (approx. 2-13 cm)
  - Stagnation flush (off/duration of flow 30 s, 24 h after last use)
  - Cleaning stop (off/120 s)
- S\_Durchfluss: max. 1 gpm  $\approx$  3,8 l/min
- Flow pressure: 0.5 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (for thermal disinfection 80 °C max. 10 min./day)
- Connection: G 1/2 AG
- Material: Housing Brass, conform to German drinking water regulations
- Surface: Chrome
- Projection to centre of aerator: 187 mm
- Certificates: P-IX 29862/IO, WRAS
- Noise class: I
- Flow class: O

### Delivery data

- Weight: 1,12 kg/Piece
- Packing unit: 1

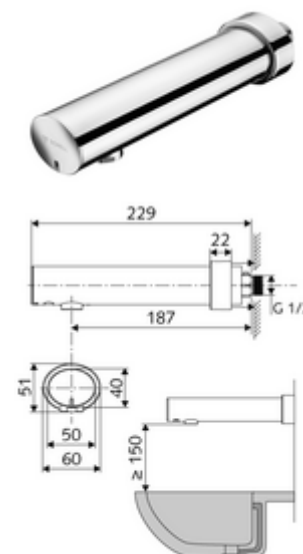

### Recommended associated articles

Flow regulator set LEED 1.3 l	Article no: 28 931 06 99	
Wash basin outlet valve OPEN	Article no: 02 002 06 99	or
Wash basin outlet valve PUSH OPEN	Article no: 02 000 06 99	or