


Article number: 02 130 06 99

## HD-K - high-pressure cold water/pre-mixed water

Manual actuation with automatic closing. Easy flow time adjustment.

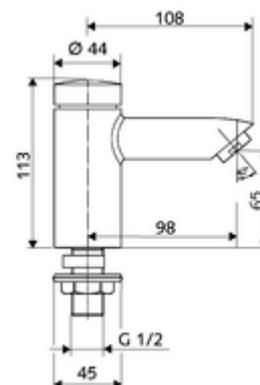

### Scope of delivery

- Self-closing single-hole tap
  - Aerator
  - Self-closing cartridge SC II
- Fastening material for wash basin installation

### Technical data

- Running time: 2 - 15 s adjustable (7 s )
- Flow: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: DN 15 G 1/2 AG
- Material: Housing Dezincification-resistant brass
- Surface: Chrome
- Certificates: P-IX 19958/IO, dr, Watermark, WELS
- Noise class: I
- Flow class: O

### Delivery data

- Weight: 0,98 kg/Piece
- Packing unit: 1

### Necessary associated articles

Article no: 76 063 06 99

### Recommended associated articles

|  |                             |
|--|-----------------------------|
| Aerator max. 5.7 l/min pressure-independent, theft-proof | Article no: 02 121 06 99    |
|  | Article no: 10 318 06 99 or |
|  | Article no: 10 319 06 99 or |
| Angle valve with regulating function COMFORT with filter | Article no: 05 430 06 99 or |
| Angle valve with regulating function COMFORT with filter | Article no: 05 428 06 99 or |
| Wash basin outlet valve OPEN                             | Article no: 02 002 06 99 or |
| Wash basin outlet valve PUSH OPEN                        | Article no: 02 000 06 99 or |

### Hint

- Not suitable for instantaneous water heaters and small storage heaters.