

Article number: 01 226 06 99

## Electronic wash basin tap PURIS E HD-M - high-pressure mixed water

Infrared sensor-controlled. Battery operation. Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC. With extended outlet 140 mm.



### Scope of delivery


- Infrared sensor single-hole tap
  - Vandal-resistant all-metal housing
  - 6 V solenoid valve with pre-filter
  - Aerator
  - Temperature controller
  - Infrared sensor electronics, programmable
  - 6 V battery compartment (integrated)
- 4x AAA alkaline battery 1.5 V
- 2 flexible Clean-Fix S connection hoses, G 3/8 IG x 380 mm, with integrated backflow preventer (EN 1717: EB-type) and pre-filter
- Fastening material for wash basin installation

### Technical data

- Setting options via SWS SSC
  - Programming via short range reflex (off/on)
  - Sensor range (short/medium/long)
  - Max. flow time (1-360 s)
  - Stagnation flush (off/5-600 s, every 1-240 h after last flush/every 1-240 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/15-600 s)
  - Duration of flow (off/15-600 s)
  - Energy saving mode (off/1-254 h after last flush)
  - Cleaning stop (off/60-360 s)
- Setting options via short range reflex
  - Sensor range (short/medium/long)
  - Stagnation flush (off/30 s, every 24 h after last flush/every 24 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/300 s/120 s)
  - Cleaning stop (off/60 s)
- S\_Durchfluss: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 2x G 3/8 IG
- Material: Housing Brass, conform to German drinking water regulations
- Surface: Chrome
- Certificates: P-IX 9523-I, Belgaqua
- Noise class: I

### Delivery data

- Weight: 2,63 kg/Piece
- Packing unit: 1

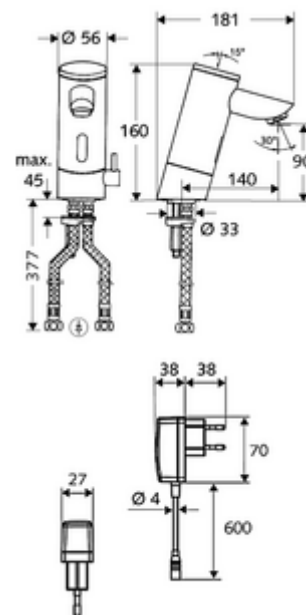

**Recommended associated articles**

|  |                          |
|--|--------------------------|
| SSC Bluetooth® module                                    | Article no: 00 916 00 99 |
| Pressure balance valve (PBV)                             | Article no: 06 558 12 99 |
| Angle valve with regulating function COMFORT with filter | Article no: 05 430 06 99 |

**Hint**

- Discontinued article, as long as stocks last
- Battery-operated fittings with conversion set 00 508 00 99 or 00 509 00 99 suitable for networking with SWS.
- Successor model: PURIS E<sup>2</sup>, art. no. 00 290 06 99