


Article number: 00 253 06 99

## Electronic wash basin tap XERIS E<sup>2</sup> HD-M small - high-pressure mixed water

Contactless, sensor-controlled tap with innovative ToF technology. Insensitive against reflective materials such as mirrors, safety vests, etc. With integrated Bluetooth® interface. Configuration, evaluation and documentation via SCHELL app. Suitable for networking with the SCHELL SWS water management system. Excluding power supply. Intended for power supply via SCHELL water management system SWS or central power supply unit.

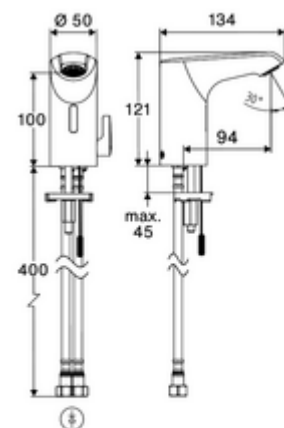

### Scope of delivery

- Time-of-flight sensor single-hole tap
  - Vandal-resistant all-metal housing
  - Time-of-flight sensor electronics (ToF) with automatic adjustment of the sensor range
  - Recessed aerator (theft-protected)
  - Connection cable, 240 mm, with 3-pin plug connector, protection class IP65
  - 6 V axial solenoid valve with pre-filter
  - Temperature controller with hot water restrictor
- 2 flexible Clean-Fix S connection hoses, G 3/8 IG x 410 mm, with integrated backflow preventer (EN 1717: EB-type) and pre-filter
- Fastening material for wash basin installation

### Technical data

- Setting options via SCHELL App
  - Quick configuration via preset operating modes (save electricity / save water / comfort)
  - Individual settings in expert mode (sensor range, sensor measuring interval, person detection, max. runtime, run-on time)
  - Stagnation flush (off / at intervals / smart demand-based flush taking usage into account / at fixed times [day(s), time])
  - Continuous flush for thermal disinfection, triggering via app (3 - 10 min)
  - Continuous flow, triggering via app (15 - 600 s)
  - Cleaning stop, triggering via app or proximity reflex (off / 60 - 360 s)
- S\_Durchfluss: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 2x G 3/8 IG
- Material: Housing Brass
- Surface: Chrome
- Certificates: PA-IX 10332/IO, DVGW applied
- Noise class: I
- Flow class: O

### Delivery data

- Weight: 1,38 kg/Piece
- Packing unit: 1

### Necessary associated articles

SWS Server

Article no: 00 500 00 99

SWS Bus mains adapter Article no: 00 505 00 99  
SWS Bus extender cable BE-K Article no: 00 501 00 99

### Recommended associated articles

Angle valve thermostat Article no: 09 414 06 99  
Angle valve with regulating function COMFORT with filter Article no: 05 430 06 99  
Wash basin outlet valve OPEN Article no: 02 002 06 99 or  
Wash basin outlet valve PUSH OPEN Article no: 02 000 06 99 or  
Standpipe extension CELIS E<sup>2</sup> / XERIS E<sup>2</sup> Article no: 01 284 06 99  
Optional power supply via collective mains adapter  
Concealed power supply unit 9 VDC, 100 - 240 VAC, 50 - 60 Hz Article no: 01 315 00 99 or  
Top-hat rail transformer 9 VDC, 100 - 240 VAC, 50 - 60 Hz Article no: 01 582 00 99 or  
Electrical junction box 9 VDC, 100 - 240 VAC, 50 - 60 Hz Article no: 01 583 00 99 or

### Hint

- Previous Electronic washbasin tap XERIS E 00 221 06 99 expected to be available until II. quarter 2025.