

NEW!



**MODUS shower thermostat with ThermoProtect-Technology.
By SCHELL.**

**New:
The first
shower fitting
in the MODUS
series**

SCHELL MODUS shower thermostat.

The safe solution for accessible building projects, such as in hospitals or nursing.

The SCHELL MODUS shower thermostat with ThermoProtect-Technology offers optimum anti-scalding protection. For users with reduced motor function, anti-scalding protection is essential – and therefore very important for public and private nursing facilities. The thermally insulated housing (IsoBody-Technology) also offers anti-scalding protection as the housing does not heat up to the touch. Intuitive operation is another key feature. This is where the MODUS shower thermostat scores points with its well-designed handles and control markings in particular.

Product description:

- Exposed shower fitting for mixed water with thermostat, according to EN 1111, unlockable temperature limiter (factory-set to 38 °C), anti-scalding protection (43 °C), even if cold water supply fails
- Open/closed 90° ceramic cartridge
- 2x backflow preventer
- Outlet: DN 15 G 1/2 male thread (bottom)
- Flow pressure (min.–max.): 1.5–5.0 bar
- Fitting flow volume: max. 20/min, conversion for LEED/BREEAM certification possible
- Material: Metal housing and handles
- Finish: chrome-plated

Advantages:

- IsoBody-Technology and concealed S-connections provide anti-scalding protection as the housing does not heat up
- Temperature limiter at 38 °C and anti-scalding protection at 43 °C, even if cold water supply fails
- Intuitive and very user-friendly operation with intelligent handle design, short rotation path (90°–ceramic head part) and self-explanatory pictograms
- Rugged and durable thanks to all-metal design for handles and housing
- Saves water when used together with SCHELL hand shower or SCHELL flow restrictors
- Optional reduction in litre output for building certifications to LEED or BREEAM
- Support for restoring drinking water hygiene to proper levels thanks to optional, tamper-proof thermal disinfection
- Timeless design with high-quality haptics



SCHELL MODUS shower thermostat at a glance.



BREEAM- and LEED-ready

Thanks to an easy approach to reducing the litre flow volume for certifications



Vandal-proof and robust

Thanks to its resilient, all-metal design



Attractive price/performance ratio

Long-lasting, trusted SCHELL quality, even for tightly-planned budgets



IsoBody-Technology

Anti-scalding protection as the the housing does not heat up



ThermoProtect-Technology

Limits temperature at outlet to offer anti-scalding protection – even if the cold water line should fail

Recommended accessory items

SCHELL VITUS shower kit

Art no. 29 189 06 99




SCHELL hand shower


Art no. 29 191 06 99



SCHELL MODUS shower thermostat

Art no. 02 185 06 99



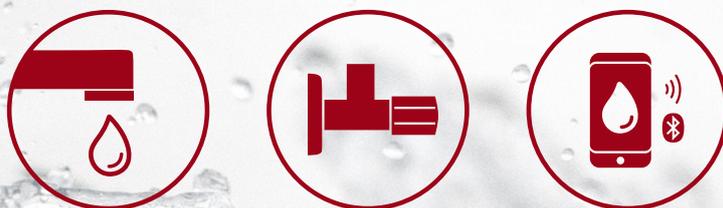

SCHELL GmbH & Co. KG
Raiffeisenstraße 31
57462 Olpe
Germany
Tel. +49 2761 892-0
Fax +49 2761 892-199
info@schell.eu
www.schell.eu



 **Carbon neutral**
Print product
ClimatePartner.com/10956-2204-1008



MIX

Paper | Supporting
responsible forestry

FSC® C111733