

Article number: 01 217 06 99

## Electronic wash basin tap PURIS E ND-M - low pressure mixed water

Infrared sensor-controlled. Mains operation (concealed transformer). Suitable for networking with the SCHELL SWS water management system. Configurable via SCHELL Single Control SSC. For open hot water storage tanks.



### Scope of delivery


- Infrared sensor single-hole tap
  - Vandal-resistant all-metal housing
  - 6 V solenoid valve with pre-filter
  - Aerator
  - Temperature controller
  - Infrared sensor electronics, programmable
  - Connection cable, 250 mm, with 3-pin plug connector, protection class IP65
- Concealed transformer 9 VDC, 100-240 VAC, 50-60 Hz
- 3 flexible Clean-Fix S connection hoses, G 3/8 IG x 380/500 mm
- Fastening material for wash basin installation

### Technical data

- Setting options via SWS SSC
  - Sensor range (short/medium/long)
  - Programming via short range reflex (off/on)
  - Max. flow time (1-360 s)
  - Follow-up time (0.6-60 s)
  - Stagnation flush (off/5-600 s, every 1-240 h after last flush/every 1-240 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/15-600 s)
  - Duration of flow (off/15-600 s)
  - Energy saving mode (off/1-254 h after last flush)
  - Cleaning stop (off/60-360 s)
- Setting options via short range reflex
  - Sensor range (short/medium/long)
  - Stagnation flush (off/30 s, every 24 h after last flush/every 24 h)
  - Continuous flush for thermal disinfection, with anti-scalding protection (off/300 s/120 s)
  - Cleaning stop (off/60 s)
- S\_Durchfluss: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 3x G 3/8 IG
- Material: Housing Brass, conform to German drinking water regulations
- Surface: Chrome

### Delivery data

- Weight: 2,56 kg/Piece
- Packing unit: 1

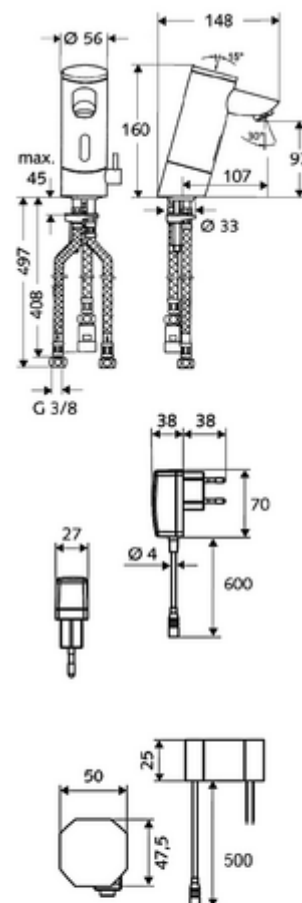

### Recommended associated articles

SSC Bluetooth® module

Article no: 00 916 00 99

Angle valve with regulating function COMFORT with filter Article no: 05 430 06 99  
Extension cable Article no: 51 010 00 99