

Article number: 01 827 00 99

## Concealed Masterbox WBD-SC-V Pre-mixed water



For LINUS D-SC-V concealed shower fittings. Manual actuation with automatic closing. With sealed housing bushings and internal isolating valve.

### Scope of delivery


- Masterbox
  - Concealed shower tap with isolating valve
  - Pre-filter
  - Roughing-in housing
  - Backflow preventer (EN 1717: EB-type)
  - Self-closing cartridge SC II
- Flushing nozzle
- Flush-mounted cap

### Technical data

- Running time: 5 - 30 s adjustable
- Flow at 3 bar: 10 l/min
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Installation depth: 80 - 104 mm
- Connection: G 1/2 IG
- Outlet: G 1/2 IG
- Material: Housing Plastic, Waterpath Dezincification-resistant brass, conform to German drinking water regulations
- Dimensions: W 138 mm x h 149 mm x d 120 mm
- Certificates: P-IX 19960/IB, DIN-DVGW, Belgauca
- Noise class: I
- Flow class: B

### Delivery data

- Weight: 1,70 kg/Piece
- Packing unit: 1

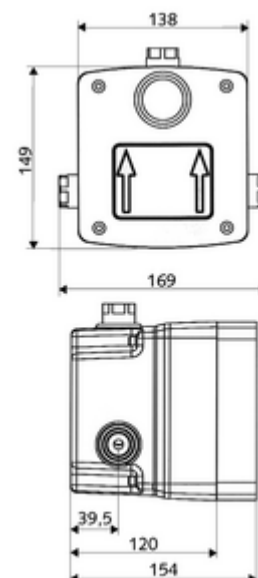

### Necessary associated articles

|  |                          |    |
|--|--------------------------|----|
| Concealed shower LINUS D-SC-V                      | Article no: 01 833 06 99 | or |
| Concealed shower LINUS D-SC-V                      | Article no: 01 833 28 99 | or |
| <u>For building sealing according to DIN 18534</u> |                          |    |
| Expansion sleeve                                   | Article no: 00 919 00 99 |    |

### Recommended associated articles

|                      |                          |
|----------------------|--------------------------|
| Shower module MONTUS | Article no: 03 091 00 99 |
|----------------------|--------------------------|