

Article number: 02 157 06 99

Self-closing wash basin taps XERIS SC HD-M mid - high-pressure mixed water

Manual actuation with automatic closing. Easy flow time adjustment.



Scope of delivery


- Self-closing single-hole tap
 - Vandal-resistant all-metal housing
 - Aerator
 - Self-closing cartridge SC II with hot water restrictor
- 2 flexible Clean-Fix S connection hoses, G 3/8 IG x 380 mm, with integrated backflow preventer (EN 1717: EB-type) and pre-filter
- Fastening material for wash basin installation

Technical data

- Running time: 2 - 15 s adjustable (7 s)
- S_Durchfluss: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: 2x G 3/8 IG
- Material: Housing Brass, conform to German drinking water regulations
- Surface: Chrome
- Certificates: PA-IX 29071/IO, Belgaqua
- Noise class: I
- Flow class: O

Delivery data

- Weight: 2,05 kg/Piece
- Packing unit: 1

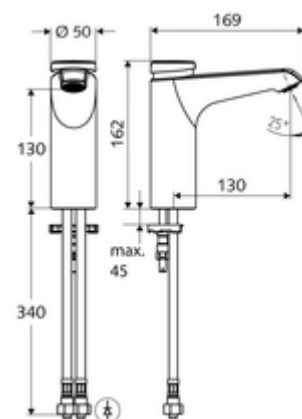

Recommended associated articles

| | |
|--|-----------------------------|
| Angle valve thermostat | Article no: 09 414 06 99 |
| Pressure balance valve (PBV) | Article no: 06 558 12 99 |
| Angle valve with regulating function COMFORT with filter | Article no: 05 430 06 99 |
| Wash basin outlet valve OPEN | Article no: 02 002 06 99 or |
| Wash basin outlet valve PUSH OPEN | Article no: 02 000 06 99 or |

Hint

- Not suitable for instantaneous water heaters and small storage heaters.